

Atlas Copco PRO

Industry & Maintenance



Sustainable Productivity



Tightening Tools

Impact Wrenches Power and durability!

W 2810



Square drive 3/8"
Impact type Twin hammer
Capacity M14
Torque range (Nm) 200-360
Max torque fwd (Nm) 470
Speed (r/min) 10 000
Weight (kg) 1.3
Length (mm) 160
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1248 10

W 2811



Square drive 1/2"
Impact type Twin hammer
Capacity M14
Torque range (Nm) 200-360
Max torque fwd (Nm) 470
Speed (r/min) 10 000
Weight (kg) 1.3
Length (mm) 160
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1248 11

W 2815



Square drive 1/2"
Impact type Twin hammer
Capacity M16
Torque range (Nm) 300-680
Max torque fwd (Nm) 1085
Speed (r/min) 7400
Weight (kg) 2
Length (mm) 191
Air consumption (l/s) 16
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1248 15

W 2820



Square drive 3/4"
Impact type Twin Hammer
Capacity M22
Torque range (Nm) 350-920
Max torque fwd (Nm) 1490
Speed (rpm) 4500
Weight (kg) 3.8
Length (mm) 240
Air consumption (l/s) 20
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"
Ordering No. 8434 1248 20

S 2480



Chuck size (Hex) 1/4"
Chuck type Double Hammer
Capacity M5
Torque range (Nm) 6-13
Max torque (Nm) 20
Speed (r/min) 6500
Weight (kg) 0.78
Length (mm) 132
Air consumption (l/s) 10
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"
Ordering No. 8431 0257 90

S 2481



Chuck size (Hex) 1/4"
Chuck type Double Hammer
Capacity M6
Torque range (Nm) 11-20
Max torque (Nm) 28
Speed (r/min) 5000
Weight (kg) 0.88
Length (mm) 143
Air consumption (l/s) 6
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"
Ordering No. 8431 0257 92

W 2110



Quick change HEX
Impact type Double Hammer
Capacity M12
Torque range (Nm) 13-70
Max torque fwd (Nm) 94
Speed (r/min) 8000
Weight (kg) 0.98
Length (mm) 160
Air consumption (l/s) 8.7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1244 20

W 2111



Square drive 3/8"
Impact type Double Hammer
Capacity M12
Torque range (Nm) 13-70
Max torque fwd (Nm) 94
Speed (r/min) 8000
Weight (kg) 0.98
Length (mm) 154
Air consumption (l/s) 8.7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1244 23

W 2210



Quick change HEX
Impact type Double Hammer
Capacity M12
Torque range (Nm) 13-70
Max torque fwd (Nm) 94
Speed (r/min) 8000
Weight (kg) 0.98
Length (mm) 160
Air consumption (l/s) 8.7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1244 20

W 2211



Square drive 3/8"
Impact type Double Hammer
Capacity M12
Torque range (Nm) 13-70
Max torque fwd (Nm) 94
Speed (r/min) 8000
Weight (kg) 0.98
Length (mm) 154
Air consumption (l/s) 8.7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1244 23

W 2216



Square drive 1/2"
Impact type Pin
Capacity M16
Torque range (Nm) 150-640
Max torque fwd (Nm) 720
Speed (r/min) 7000
Weight (kg) 2.5
Length (mm) 195
Air consumption (l/s) 11.6
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1244 75

W 2219



Square drive 3/4"
Impact type Pin
Capacity M22
Torque range (Nm) 450-700
Max torque fwd (Nm) 1030
Speed (r/min) 3800
Weight (kg) 5.1
Length (mm) 225
Air consumption (l/s) 12.2
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1244 37

W 2315XP



Square drive 1/2"
Impact type Pin
Capacity M16
Torque range (Nm) 320-610
Max torque fwd (Nm) 7000
Speed (r/min) 3800
Weight (kg) 2.5
Length (mm) 190
Air consumption (l/s) 12
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1245 17

W 2320XP



Square drive 3/4"
Impact type Pin
Capacity M22
Torque range (Nm) 340-870
Max torque fwd (Nm) 1050
Speed (r/min) 4000
Weight (kg) 4.7
Length (mm) 240
Air consumption (l/s) 19
Suitable air hose (mm) 13
Air inlet thread (BSP) 1/4"
Ordering No. 8434 1245 22

W 2220



Square drive 3/4"
Impact type Pin
Capacity M30
Torque range (Nm) 670-1200
Max torque fwd (Nm) 1300
Speed (r/min) 3800
Weight (kg) 5.3
Length (mm) 270
Air consumption (l/s) 18
Suitable air hose (mm) 13
Air inlet thread (BSP) 1/2"
Ordering No. 8434 1244 39

W 2226C



Square drive 1"
Impact type Pin
Capacity M30
Torque range (Nm) 670-1200
Max torque fwd (Nm) 1300
Speed (r/min) 3800
Weight (kg) 5.8
Length (mm) 270
Air consumption (l/s) 18
Suitable air hose (mm) 13
Air inlet thread (BSP) 1/2"
Ordering No. 8434 1244 56

W 2227



Square drive 1"
Impact type Pin
Capacity M30
Torque range (Nm) 670-1200
Max torque fwd (Nm) 1300
Speed (r/min) 5000
Weight (kg) 6.8
Length (mm) 355
Air consumption (l/s) 18
Suitable air hose (mm) 13
Air inlet thread (BSP) 1/2"
Ordering No. 8434 1244 58

W 2225C



Square drive 1"
Impact type Pin
Capacity M36
Torque range (Nm) 810-1500
Max torque fwd (Nm) 2710
Speed (r/min) 4000
Weight (kg) 10.1
Length (mm) 290
Air consumption (l/s) 36
Suitable air hose (mm) 13
Air inlet thread (BSP) 1/2"
Ordering No. 8434 124454

W 2228



Square drive 3/4"
Impact type Pin
Capacity M36
Torque range (Nm) 810-1500
Max torque fwd (Nm) 2710
Speed (r/min) 4000
Weight (kg) 11.6
Length (mm) 410
Air consumption (l/s) 36
Suitable air hose (mm) 13
Air inlet thread (BSP) 1/2"
Ordering No. 8434 1244 62

Accessories



Material Removal

Drills & Grinders

Superior hole quality, Get more done in less time

D2112



Chuck capacity (mm) 0-6.5
Mount (UNF) 3/8"-24
Output (W) 350
Speed (r/min) 5400
Weight (kg) 1
Length incl chuck (mm) 206
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0405 05

D2112Q



Chuck capacity (mm) 1-10
Mount (UNF) 3/8"-24
Output (W) 350
Speed (r/min) 5400
Weight (kg) 1
Length incl chuck (mm) 211
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0405 05

D2116



Chuck capacity (mm) 1.5-10
Mount (UNF) 3/8"-24
Output (W) 350
Speed (r/min) 2400
Weight (kg) 1
Length incl chuck (mm) 211
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0405 13


D2116Q



Chuck capacity (mm) 1.5-10
Mount (UNF) 3/8"-24
Output (W) 350
Speed (r/min) 2400
Weight (kg) 1
Length incl chuck (mm) 211
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0405 15

D2121



Chuck capacity (mm) 2-13
Mount (UNF) 3/8"-24
Output (W) 340
Speed (r/min) 750
Weight (kg) 1.4
Length incl chuck (mm) 248
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0405 21

D2121Q



Chuck capacity (mm) 1.5-13
Mount (UNF) 3/8"-24
Output (W) 340
Speed (r/min) 750
Weight (kg) 1.4
Length incl chuck (mm) 248
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0405 25

D2148-R



Chuck capacity (mm) 2-13
Mount (UNF) 3/8"-24
Output (W) 250
Speed (r/min) 750
Weight (kg) 1.45
Length incl chuck (mm) 248
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0407 03

D2148-RQ



Chuck capacity (mm) 1.5-13
Mount (UNF) 3/8"-24
Output (W) 250
Speed (r/min) 750
Weight (kg) 1.45
Length incl chuck (mm) 248
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0407 05

Straigh Drill D2160



Chuck capacity (mm) 1.5-10
Mount (UNF) 3/8"-24
Output (W) 460
Speed (r/min) 2400
Weight (kg) 0.85
Length incl chuck (mm) 234
Air consumption (l/s) 11
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0410 16

Straigh Drill D2160-Q



Chuck capacity (mm) 1.5-10
Mount (UNF) 3/8"-24
Output (W) 460
Speed (r/min) 2400
Weight (kg) 0.85
Length incl chuck (mm) 234
Air consumption (l/s) 11
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0410 20

Angel Grip W 2163



Chuck capacity (mm) 1.5-10
Mount (UNF) 3/8"-24
Output (W) 300
Speed (r/min) 2000
Weight (kg) 1.1
Length incl chuck (mm) 242
Height incl chuck (mm) 128
Air consumption (l/s) 9.3
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0410 08

Angel Grip W 2163-Q



Chuck capacity (mm) 1.5-10
Mount (UNF) 3/8"-24
Output (W) 300
Speed (r/min) 2000
Weight (kg) 1.1
Length incl chuck (mm) 242
Height incl chuck (mm) 128
Air consumption (l/s) 9.3
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8421 0410 15

G 2408-100



Speed (r/min) 12000
Output (W) 350
Max wheel diam (mm) 100
Spindle thread (UNF) 3/8"-24
Length (mm) 225
Weight (kg) 0.9
Air consumption (l/s) 13.1
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8423 0314 60

G 2408-125



Speed (r/min) 12000
Output (W) 350
Max wheel diam (mm) 125
Spindle thread (UNF) 3/8"-24
Length (mm) 225
Weight (kg) 0.9
Air consumption (l/s) 13.1
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8423 0314 80

G 2510-100



Speed (r/min) 13300
Output (W) 800
Max wheel diam (mm) 100
Spindle thread (UNF) 3/8"-24
Length (mm) 207
Weight (kg) 1.6
Air consumption (l/s) 17
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"

Ordering No. 8423 0316 02

G 2510-115



Speed (r/min) 12000
Output (W) 800
Max wheel diam (mm) 115
Spindle thread M14
Length (mm) 207
Weight (kg) 1.6
Air consumption (l/s) 17
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"

Ordering No. 8423 0316 01

G 2510-125



Speed (r/min) 12000
Output (W) 800
Max wheel diam (mm) 125
Spindle thread M14
Length (mm) 207
Weight (kg) 1.6
Air consumption (l/s) 17
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"

Ordering No. 8423 0316 00

G 2515



Speed (r/min) 8400
Output (kW) 1.3
Max wheel diam (mm) 180
Spindle thread (UNC) 5/8"-11
Length (mm) 353
Weight (kg) 3.2
Air consumption (l/s) 19
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"

Ordering No. 8423 0316 05

G 2415



Speed (r/min) 8500
Output (W) 1100
Max wheel diam (mm) 180
Max cup wheel (mm) 100
Max wire brush (mm) -
Spindle thread (UNC) 5/8"-11
Height (mm) 198
Length (mm) 280
Weight (kg) 2.65
Air consumption (l/s) 21
Suitable air hose (mm) 13
Air inlet thread (BSP) 1/2"

Ordering No. 8423 2522 49

G 2416



Speed (r/min) 6000
Output (W) 900
Max wheel diam (mm) 180
Max cup wheel (mm) 125
Max wire brush (mm) 140
Spindle thread (UNC) 5/8"-11
Height (mm) 198
Length (mm) 280
Weight (kg) 2.65
Air consumption (l/s) 18
Suitable air hose (mm) 13
Air inlet thread (BSP) 1/2"

Ordering No. 8423 2522 56

Material Removal

Grinders & Sanders

Get more done in less time, For the Optimal surface finishing

Die grinder G2412-1



Speed (r/min) 20 000
Collet (mm) 6 & 1/4"
Output (W) 350
Length (mm) 178
Weight (kg) 0.5
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0312 21

Die grinder G2422-1



Speed (r/min) 20 000
Collet (mm) 6 & 1/4"
Output (W) 350
Length (mm) 277
Weight (kg) 0.7
Air consumption (l/s) 10.3
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0312 47

Die grinder G2414 S200



Speed (r/min) 20 000
Collet (mm) 6 & 1/4"
Output (W) 900
Length (mm) 215
Weight (kg) 0.78
Air consumption (l/s) 9
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"
Ordering No. 8423 0312 30

Die grinder G2424 S085



Speed (r/min) 8500
Collet (mm) 6 & 1/4"
Output (W) 440
Length (mm) 315
Weight (kg) 0.96
Air consumption (l/s) 4.2
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"
Ordering No. 8423 0312 81

Die grinder G2424 S250



Speed (r/min) 25 000
Collet (mm) 6 & 1/4"
Output (W) 900
Length (mm) 315
Weight (kg) 0.96
Air consumption (l/s) 14.5
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"
Ordering No. 8423 0312 62

Low Speed Die grinder G2440



Speed (r/min) 4300
Collet (mm) 6
Output (W) 550
Length (mm) 216
Weight (kg) 0.9
Air consumption (l/s) 6
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0312 20

Angel die grinder G2445



Speed (r/min) 15 000
Collet (mm) 6
Output (W) 255
Length (mm) 188
Weight (kg) 0.7
Air consumption (l/s) 7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0312 80

High speed die grinder G2451



Collet (mm) 1/8", 3mm
Output (W) 80
Speed (r/min) 80000
Weight (kg) 0.48
Length (mm) 140
Air inlet thread (BSP) 1/4"
Suitable air hose (mm) 5
Ordering No. 8423 0313 01

Angel sander G2510 S066



Speed (r/min) 6600
Output (W) 800
Recommended pad size (mm) 180
Spindle thread (UNC) 5/8"
Length (mm) 207
Weight (kg) 1.4
Air consumption (l/s) 17
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"
Ordering No. 8423 0316 39

Angel sander G2510 S085



Speed (r/min) 6500
Output (W) 800
Recommended pad size (mm) 180
Spindle thread (UNC) 5/8"
Length (mm) 207
Weight (kg) 1.4
Air consumption (l/s) 17
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"
Ordering No. 8423 0316 35

Belt sander G2403



Rotational speed (r/min) 18 000
Belt speed (m/min) 1300
Belt dimension (mm) 10x330
Output (W) 250
Length (mm) 280
Weight (kg) 0.8
Air consumption (l/s) 11
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0304 33

Belt sander G2404



Rotational speed (r/min) 16500
Belt speed (m/min) 2540
Belt dimension (mm) 20x520
Output (W) 400
Length (mm) 360
Weight (kg) 1.4
Air consumption (l/s) 11
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0304 44

Pistol sander G 2302



Speed (r/min) 17000
Pad size (mm) 76.2
Output (W) 175
Length (mm) 109
Weight (kg) 0.6
Dia orbit (3/4) 3"
Air consumption (l/s) 8.9
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0312 14

Pistol sander G 2502



Speed (r/min) 12000
Output (W) 270
Pad size (mm) 125
Spindle thread (UNF) 7/16"
Length (mm) 108
Weight (kg) 1
Air consumption (l/s) 12
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0312 05

Random orbital sander G 2428-10



Speed (r/min) 9025
Output (W) 270
Pad size (mm) 150
Length (mm) 170
Weight (kg) 1.5
Air consumption (l/s) 9
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 2810 16

Random orbital sander G 2438-6.5N



Speed (r/min) 12000
Output (W) 160
Dia orbit (mm) 5
Pad size (mm) 150
Velcro pad (hole) No
Spindle thread (UNF) 5/16"
Length (mm) 170
Weight (kg) 0.9
Air consumption (l/s) 9
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0313 05

Random orbital sander G 2438-6.5C



Speed (r/min) 12000
Output (W) 160
Dia orbit (mm) 5
Pad size (mm) 150
Velcro pad (hole) 6
Spindle thread (UNF) 5/16"
Length (mm) 215
Weight (kg) 0.9
Air consumption (l/s) 9
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0313 25

Random orbital sander G 2438-6.5I



Speed (r/min) 12000
Output (W) 160
Dia orbit (mm) 5
Pad size (mm) 150
Velcro pad (hole) 6
Spindle thread (UNF) 5/16"
Length (mm) 235
Weight (kg) 1
Air consumption (l/s) 9
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0313 15

Polishing sander G 2406



Speed (r/min) 2000
Output (W) 350
Support pad (mm) 125 - 200
Spindle thread (UNF) 3/8" - 24
Length (mm) 300
Weight (kg) 1.4
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0304 88

Polishing sander G 2407



Speed (r/min) 3400
Output (W) 350
Support pad (mm) 125 - 200
Spindle thread (UNF) 3/8" - 24
Length (mm) 300
Weight (kg) 1.4
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"
Ordering No. 8423 0304 77

Percussive Tools

We have an ergonomic solution

Engraving pen P2505



Blows (Hz) 190
Length (mm) 175
Weight (kg) 0.12
Air consumption (l/s) 0.6
Suitable air hose (mm) 3.2
Air inlet thread (BSP) 1/8"

Ordering No. 8425 0102 72

Weld Flux Chipper P2520



Chisel shank (mm) 12.7
Blows (Hz) 90
Piston stroke (mm) 16
Length (mm) 182
Weight (kg) 1
Air consumption (l/s) 2
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0103 15

Chipping Hammer P2530-H



Chisel shank hex (mm) 10.2
Blows (Hz) 60
Piston stroke (mm) 38
Length (mm) 140
Weight (kg) 1.1
Air consumption (l/s) 6
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0206 15

Chipping Hammer P2531-H



Chisel shank hex (mm) 10.2
Blows (Hz) 50
Piston stroke (mm) 44.5
Length (mm) 193
Weight (kg) 1.5
Air consumption (l/s) 7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0206 20

Chipping Hammer P2535-H



Chisel shank hex (mm) 12
Blows (Hz) 50
Piston stroke (mm) 44.5
Length (mm) 273
Weight (kg) 2.5
Air consumption (l/s) 7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0206 30

Chipping Hammer P2536-H



Chisel shank hex (mm) 17.5
Blows (Hz) 50
Piston stroke (mm) 25
Length (mm) 301
Weight (kg) 5
Air consumption (l/s) 10
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"

Ordering No. 8425 0206 35

Chipping Hammer P2539-H



Chisel shank hex (mm) 17.5
Blows (Hz) 28
Piston stroke (mm) 102
Length (mm) 425
Weight (kg) 6.8
Air consumption (l/s) 11
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"

Ordering No. 8425 0206 50

Riveting Hammer P2530-R



Chisel shank round (mm) 10.2
Riveting capacity steel (mm) 2.5
Riveting capacity alu (mm) 3.2
Blows (Hz) 60
Piston stroke (mm) 38
Length (mm) 140
Weight (kg) 1.1
Air consumption (l/s) 6
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0206 16

Riveting Hammer P2531-R



Chisel shank round (mm) 10.2
Riveting capacity steel (mm) 5.0
Riveting capacity Alu (mm) 6.4
Blows (Hz) 50
Piston stroke (mm) 44.5
Length (mm) 193
Weight (kg) 1.5
Air consumption (l/s) 7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0206 21

Riveting Hammer P2535-R



Chisel shank round (mm) 14
Blows (Hz) 50
Piston stroke (mm) 44.5
Length (mm) 273
Weight (kg) 2.5
Air consumption (l/s) 7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0206 31


Riveting Hammer P2536-R



Chisel shank round (mm) 17.5
Blows (Hz) 50
Piston stroke (mm) 25
Length (mm) 301
Weight (kg) 5
Air consumption (l/s) 10
Suitable air hose (mm) 13
Air inlet thread (BSP) 3/8"

Ordering No. 8425 0206 36

Accessories



Flat chisel

Sharp chisel

Rivet cutter

Spot weld chisel

Needle Scaler P2540



Blows (Hz) 40
Piston stroke (mm) 11
Length (mm) 340
Weight (kg) 2.7
Air consumption (l/s) 8
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0103 40

Needle Scaler P2541



Blows (Hz) 40
Piston stroke (mm) 11
Length (mm) 370
Weight (kg) 3.35
Air consumption (l/s) 8
Suitable air hose (mm) 10 (3/8")
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0103 41

Scaler P2550



Chisel shank (mm) 12.7 (1/2") sq
Blows (Hz) 40
Piston stroke (mm) 11
Length (mm) 395
Weight (kg) 3.2
Air consumption (l/s) 8
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0103 50


Scaler P2551



Chisel shank (mm) 12.7 (1/2") sq
Blows (Hz) 40
Piston stroke (mm) 11
Length (mm) 435
Weight (kg) 2.95
Air consumption (l/s) 8
Suitable air hose (mm) 10 (3/8")
Air inlet thread (BSP) 1/4"

Ordering No. 8425 0103 51

Flexibility

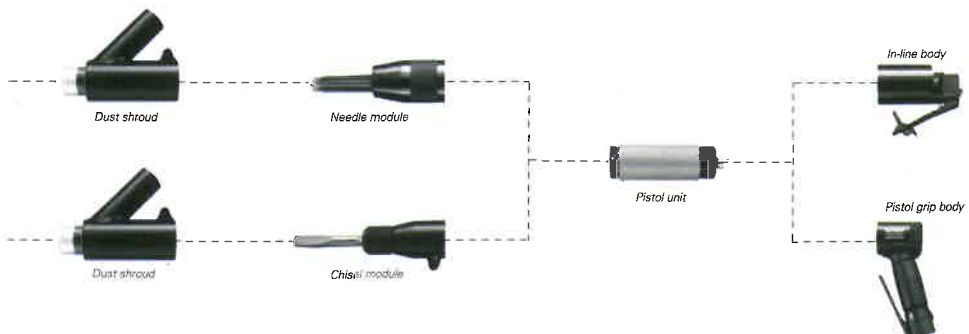

Dust shroud

Needle module

In-line body

Pistol unit

Pistol grip body

Dust shroud

Chisel module

Tightening Tools

Ratchet wrenches & Screw drivers
Compact and power full, speed and precision

W2611



Square drive 1/4"
Capacity M8
Torque range (Nm) 4-40
Speed (r/min) 280
Length (mm) 192
Weight (kg) 0.55
Air consumption (l/s) 9
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0350 11

W2620



Square drive 1/2"
Capacity M12
Torque range (Nm) 5-68
Speed (r/min) 170
Length (mm) 271
Weight (kg) 1.1
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0350 20

W2630



Square drive 1/2"
Capacity M14
Torque range (Nm) 25-80
Speed (r/min) 200
Length (mm) 307
Weight (kg) 1.2
Air consumption (l/s) 11
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0350 30

W2631



Square drive 3/8"
Capacity M14
Torque range (Nm) 25-80
Speed (r/min) 200
Length (mm) 307
Weight (kg) 1.2
Air consumption (l/s) 11
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0350 31


Impact Drive S2480



Chuck size (Hex) 1/4"
Chuck type Double Hammer
Capacity M5
Torque range (Nm) 6-13
Max torque (Nm) 20
Speed (r/min) 6500
Weight (kg) 0.78
Length (mm) 132
Air consumption (l/s) 10
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 90

Impact Drive S2481



Chuck size (Hex) 1/4"
Chuck type Double Hammer
Capacity M5
Torque range (Nm) 11-20
Max torque (Nm) 28
Speed (r/min) 5000
Weight (kg) 0.88
Length (mm) 143
Air consumption (l/s) 8
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 92

Impact Drive S2305



Chuck size (Hex) 1/4"
Capacity M8
Wood screw No 12
Torque range (Nm) 0-12
Speed (r/min) 750
Weight (kg) 0.9
Length (mm) 198
Air consumption (l/s) 5.6
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 28

Impact Drive S2326



Chuck size (Hex) 1/4"
Capacity M6
Wood screw No 8
Torque range (Nm) 0-4.5
Speed (r/min) 2400
Weight (kg) 0.8
Length (mm) 178
Air consumption (l/s) 5.6
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 36

Slip Clutch S2308-C



Chuck size (Hex) 1/4"
Capacity M6
Torque range (Nm) 2.5-11
Speed (r/min) 950
Weight (kg) 1.1
Length (mm) 225
Air consumption (l/s) 8.4
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 20

Slip Clutch S2309-C



Chuck size (Hex) 1/4"
Capacity M5
Torque range (Nm) 1.5-7.5
Speed (r/min) 1200
Weight (kg) 1
Length (mm) 245
Air consumption (l/s) 10
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 22

Slip Clutch S2310-C



Chuck size (Hex QC) 1/4"
Capacity M5-M8
Torque range (Nm) 2-15
Speed (r/min) 800
Weight (kg) 1.4
Length (mm) 277
Air consumption (l/s) 8.5
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 24

Slip Clutch S2340-C



Chuck size (Hex) 1/4"
Capacity M3
Torque range (Nm) 0.5-2
Speed (r/min) 1300
Weight (kg) 0.9
Length (mm) 250
Air consumption (l/s) 4
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 40

Slip Clutch S2360-C



Chuck size (Hex QC) 1/4"
Capacity M4-M5
Torque range (Nm) 1.3-7
Speed (r/min) 700
Weight (kg) 0.9
Length (mm) 260
Air consumption (l/s) 4
Suitable air hose (mm) 6.3 (1/4")
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 60

Slip Clutch S2370-C



Chuck size (Hex) 1/4"
Capacity M5
Torque range (Nm) 2-6
Speed (r/min) 1300
Weight (kg) 0.9
Length (mm) 250
Air consumption (l/s) 4
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 70

Shut-Off S2450-P



Chuck size (Hex) 1/4"
Capacity M5
Torque range (Nm) 2.4-5
Speed (r/min) 1100
Weight (kg) 1.1
Length (mm) 225
Air consumption (l/s) 6
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 84

Shut-Off S2451-P



Chuck size (Hex) 1/4"
Capacity M5
Torque range (Nm) 3.5-7.5
Speed (r/min) 800
Weight (kg) 1.1
Length (mm) 250
Air consumption (l/s) 7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 86

Shut-Off S2452-P



Chuck size (Hex) 1/4"
Capacity M6
Torque range (Nm) 3.5-12
Speed (r/min) 580
Weight (kg) 1.1
Length (mm) 250
Air consumption (l/s) 7
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 87

Shut-Off S2416-L



Chuck size (Hex) 1/4"
Capacity M3
Torque range (Nm) 0.5-1.6
Speed (r/min) 1500
Weight (kg) 0.9
Length (mm) 230
Air consumption (l/s) 6
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 82

Shut-Off S2426-L



Chuck size (Hex) 1/4"
Capacity M4
Torque range (Nm) 1.2-2.6
Speed (r/min) 1500
Weight (kg) 0.9
Length (mm) 230
Air consumption (l/s) 6
Suitable air hose (mm) 10
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 80

Shut-Off S2428-L




Chuck size (Hex QC) 1/4"
Capacity M4-M5
Torque range (Nm) 3.5-7
Speed (r/min) 700
Weight (kg) 1
Length (mm) 242
Air consumption (l/s) 6
Suitable air hose (mm) 6.3
Air inlet thread (BSP) 1/4"

Ordering No. 8431 0257 81

Impact & ratchet wrenches

Impact & ratchet wrenches recommended torque range

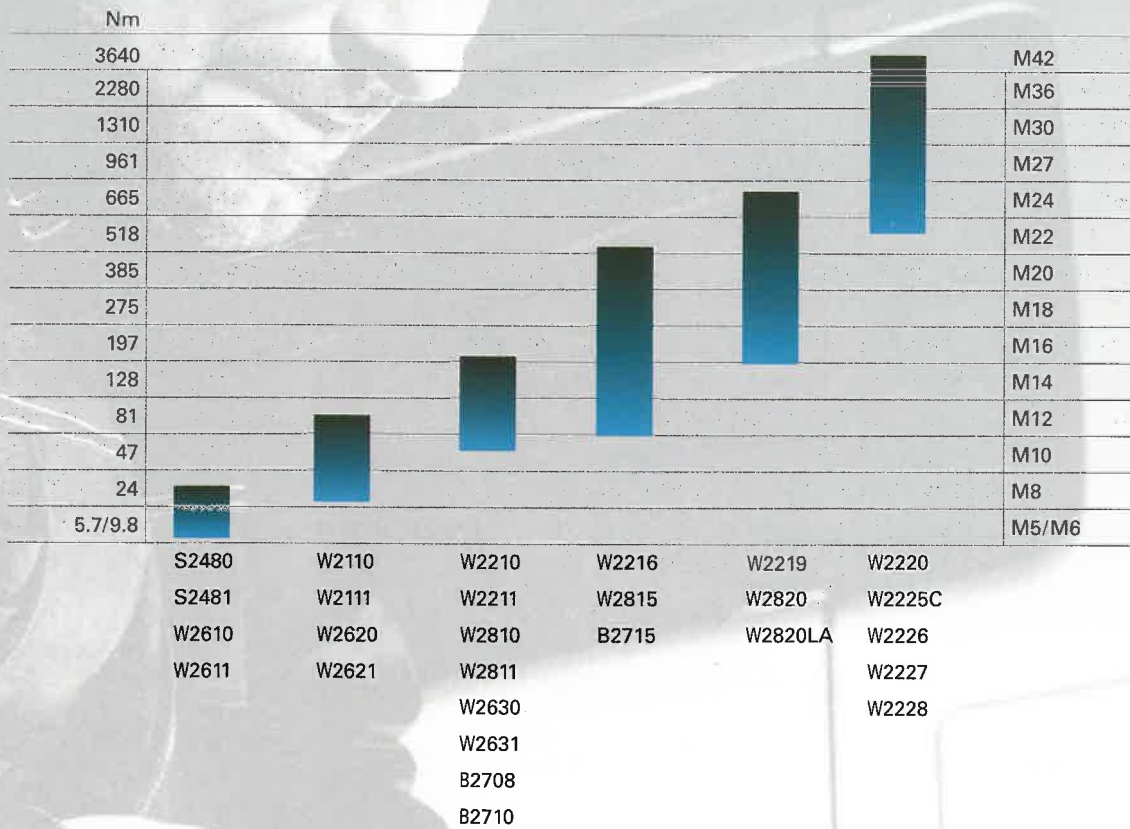

Screw driver

Type	Machine screw 4.8	Machine screw 8.8	Thread forming screw-M	Thread forming screw-ST	Thread forming screw-ST plastic	Self drilling screw-S	Wood screw
Impact clutch	Recommended	Recommended	Recommended	Recommended	Not recommended	Recommended	Recommended
Direct drive	OK	OK	OK	OK	Not recommended	Recommended	Recommended
Slip clutch	OK	OK	OK	Recommended	OK	Recommended	Recommended
Shut-off clutch	Recommended	Recommended	Recommended	OK	Recommended	OK	Not recommended

■ Recommended
■ OK
■ Not recommended

Drill

Model	r/min	Mild steel 20-30 m/min	Alloy steel 5-15 m/min	Cast iron 15-20 m/min	Aluminum and bronze 50-80 m/min	Wood and board 80-150 m/min	Composite 50-100 m/min
D2112	5,400	1.0-2.0	-	-	2.5-5.0	4.0-8.0 ^a	1.0-5.0
D2116/D2160	2,400	2.5-6.0	1.0-3.0	2.0-4.0	8.0-13.0 ^a	8.0-13.0 ^a	-
D2163	2,000	2.5-6.0	1.0-3.0	2.0-4.0	8.0-13.0 ^a	8.0-13.0 ^a	-
D2121	750	8.0-13.0	3.0-8.0	7.0-13.0	-	-	-
D2148-R	750	8.0-13.0	3.0-8.0	7.0-13.0	-	-	-

a) Drill size larger than standard chuck capacity.